

# Instructions on removing and cleaning a kitchen mixer ceramic cartridge




Ensure the water supply to your tap is OFF. Please use the provided hex key to remove the lever handle. You can locate the grub screw that holds the handle underneath the handle



When the lever handle is removed you will see the cartridge exposed and a metal collar



Twist off the metal collar. Usually it can come off with no tools. A Hex threaded collar is then exposed. Please remove this with a shifting spanner or equivalent

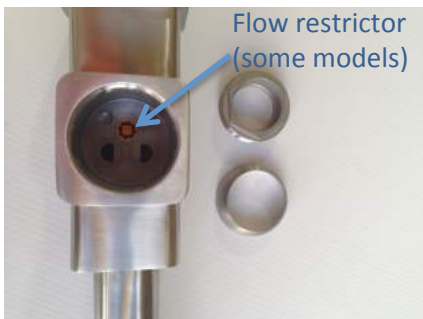

Once the second collar is removed the cartridge can be removed exposing the cartridge cavity. Please clean out this cavity with water. The flow restrictor, if present in this cavity, can also be cleaned or removed, to maximise flow for the mixer.



The cartridge should be inspected for blockages or splits in the rubber rings and flushed with water. It can then be fitted back into the cavity (the guide knobs ensure it only fits one way) and the above steps reversed to finish the installation of the mixer.