


Installation Instructions for Lever Handle Set for a New Door Installation

(not applicable to privacy sets or mortise lock installation)

Renovator Store Pty Ltd
ABN 79 155 958 848


Step 1: Preparation



Important Note: This sheet not applicable to privacy or mortise lock installation


- ① Cut template on LINE (A) and fold on LINE (B) – see below
- ② Tape template on door at preferred height. Use pencil to mark height of latch at (C) and centre of drill holes
- ③ Drill 25mm latch hole in centre of door edge using 25mm spade drill to an 85mm depth (important to drill accurately and squarely)
- ④ Drill door front holes (D) as per template

Step 2: Install Latch



- ① Place latch (E) into 25mm hole on door edge and mark door accurately around the plate
- ② Using a hammer and sharp chisel, check out the timber so latch fits into the new recess flush with door
- ③ Fit latch and drill 2mm pilot holes and use included screws to fit

Step 3: Installing Lever Assembly to the Door

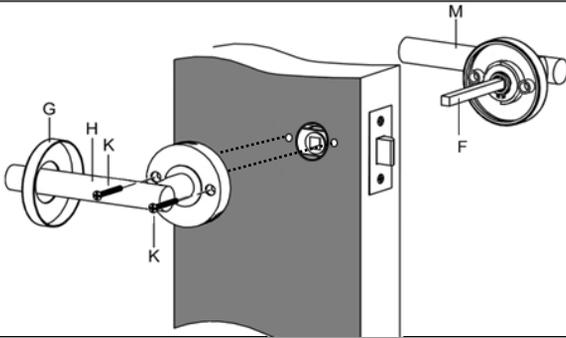

- ① Remove cover plates (G) from each handle inner rose (if necessary)
- ② Insert lever handle (M) with spindle (F) through the door
- ③ Place other lever handle (H) onto the spindle
- ④ Now insert the two long screws (K) from the inside of the door and fasten through the inner handle rose on both sides and firmly tighten (note that (K) can be cut to length to match door width with appropriate tools)
- ⑤ Tighten the grub screw on the underside of each handle with the supplied hex key to secure handles firmly to spindle
- ⑥ Fix optional inner rose timber screws for additional handle stability
- ⑦ Place the cover plates (G) over the handles and press firmly onto the inner handle rose so they finish against the door

CUT HERE – Line (A)



FOLD HERE – Line (B)

Fold here on door edge ▼

Tape template to door

Tape template to door

Suits doors 32mm to 45mm thick

Backset 60mm

(C) Mark centre -line of latch hole
(C) Mark centre -line of latch hole

38mm

(D) 6.0mm (1/4") hole

(D) 25mm (1.0") hole

(D) 6.0mm (1/4") hole

Optional screw fixing holes

- Round rose
- Square rose

WARNING:

Check your template is printed to the correct scale by testing the measurements on this page

TEMPLATE