


## Geb LED Bollard Light - 13W Warm White - Tapered - 800mm Grey

Brand: CLA LIGHTING • Product SKU: CLA-GEB3-1667 • RRP: \$203.45



### PRODUCT DESCRIPTION

This LED bollard path light is chosen by many people to light the pathways and landscapes outside their houses. Its die-cast aluminum construction makes it strong enough to be installed in outdoor settings for long periods of time. It uses energy-efficient LED chips to produce 3000K warm white light.

Also comes in [500mm](#).

### FEATURES

- ENERGY EFFICIENT - This bollard light uses LED technology, which makes it highly efficient
- DUST AND SPLASH PROOF - The IP54 rating makes it a good lighting solution for outdoor settings
- DEPENDABLE - The 800mm height provides additional security to your pathways and landscapes
- STYLISH - It has a tapered design and grey finish that match well with most modern styles
- FUNCTIONAL - Produces a 3000K warm light

Information and prices shown in this document may change without prior notice. Please refer to our website for the most accurate, up-to-date information about this product.



Money Back Guarantee\*



Enjoy Free Freight Protection



Earn Reno Dollars as a MEMBER

## ADDITIONAL INFORMATION

### Specifications:

- **Height:** 800mm
- **Width:** 140mm
- **Depth:** 140mm
- **Pole Base Outer Diameter:** 90mm
- **Pole Base Inner Diameter:** 29mm
- **Weight:** 1.80KG
- **Lighting Type:** LED
- **LED chip type:** 3030 (12pcs)
- **Kelvin:** 3000K
- **Lumens:** 580LM
- **Beam angle:** 120 degrees
- **Wattage:** 13W
- **IP rating:** IP54
- *To maintain the IP rating please use circular cable in junction*
- *For parallel and single connection, we recommend using an appropriate IP68 connector (CLA Connector: [CONN001](#) & [CONN002](#))*
- **Input voltage range:** 100-240V AC 50/60Hz
- **Output voltage range:** 18-42V
- **Bollard Design:** Tapered
- **Material:** Aluminium (Die-cast)
- **Finish:** Grey
- **Mounting:** Solid surface such as a concrete path or sturdy timber decking
- **Power factor:** >0.5
- **CRI:** >80
- **Ambient temp:** -20 to 50 degrees Celsius
- **Lifetime:** 30,000 hours
- *Not suitable for dimming*
- *Suitable for use with sensors*
- *Suitable for 2-way switching*
- *Bollard lights cannot be used inground*

Information and prices shown in this document may change without prior notice. Please refer to our website for the most accurate, up-to-date information about this product.



Money Back Guarantee\*




Enjoy Free Freight Protection



Earn Reno Dollars as a MEMBER

## ADDITIONAL INFORMATION

### Dimensions:

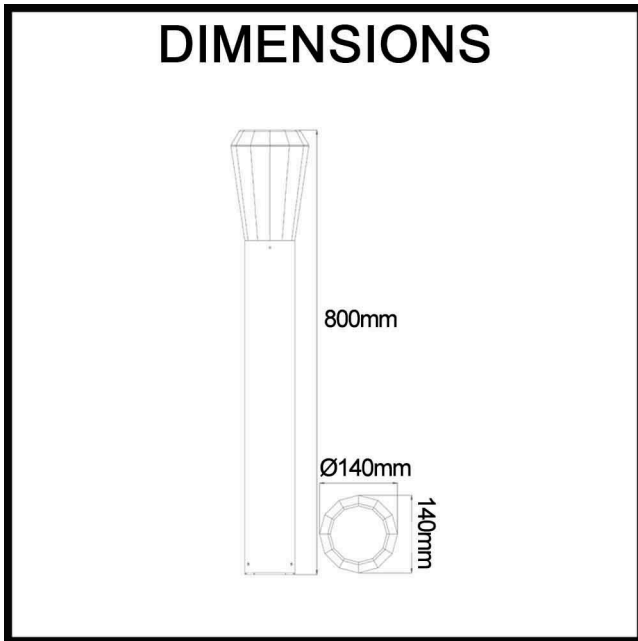

*Information and prices shown in this document may change without prior notice. Please refer to our website for the most accurate, up-to-date information about this product.*



Money Back Guarantee\*



Enjoy Free Freight Protection



Earn Reno Dollars as a MEMBER